

MAZIC GW-1560



Features

- Intel® Core™ / Intel® Celeron® Processor
- 15.6" Bezel-Free Display with PCAP Touch & LED Backlight
- Improved product reliability with high-qualified circuit elements
- Complete FAN Free with innovative heat pipe design (Fanless)
- Full Aluminum Die-casting Cabinet
- Completely Refined Design for MAZIC Series
- Elegant & Robust Dual Hinge (Foldable)
- Swappable System Box
- Spill and Dust Resistant
- Modernized external I/O Box for I/O extension


Specifications

System	Processors	Intel® Core™ i5-7200U (3M Cache, 2.50/3.10 GHz (Turbo), 2 Cores) Intel® Core™ i3-7100U (3M Cache, 2.40 GHz, 2 Cores) Intel® Celeron® Processor J3455 (2M Cache, up to 2.3 GHz, 4 Cores)
	Chipset	7200U/7100U Intel® Kaby Lake J3455 Intel® Apollo Lake
	Memory	7200U/7100U 4GB Standard, DDR4 2133 MT/s, Socket 1 x SODIMM (Max. 16GB) J3455 4GB Standard, DDR3L 1600 MT/s, Socket 1 x SODIMM
	Storage	NVME M.2 128G
	RAID	7200U/7100U RAID 0,1 (SATA Only)
	Operating Systems	Windows 10 IoT Enterprise
	Audio	Realtek ALC662-VD
Display	Type	15.6" TFT LCD, LED Backlight
	Resolution	1366 x 768
	Brightness	400 cd/m ² (typ.)
	Touchscreen	Projected Capacitive Touch, AF
Interface	Display	1 x Display port (USB-C)
	USB	5 (Rear 5, USB 3.0 x 2, USB 2.0 x 2, USB C type x 1) 3 (Reserved for MSR, SCR, i-Button/Touch Controller)
	Serial	2 (COM 1 reserved MSR/SCR, TX/RX only) (COM2 reserved CDP, TX/RX only)
	Cash Drawer Port	1 x RJ-11 (Integrated circuit GPIO)
	LAN	1 x Gigabit Ethernet, RJ-45
	Audio	1 x Line-out
	Power DC-IN	USB C
Power	Power Supply	Adaptor 12V, 5A / 24V, 6.35A (I/O BOX Option)
Physical & Environmental	Operating Temperature	0 °C ~ 60 °C at 10% to 90% Humidity
	Storage Temperature	-20 °C ~ 80 °C at 10% to 90% Humidity
	Dimensions (W x H x D)	400 x 380 x 245 (mm), 15.7 x 14.9 x 9.6 (in)
	Packing Dimensions (W x H x D)	500 x 170 x 310 (mm), 19.7 x 6.7 x 12.2 (in)
	Net Weight	6.1 Kg, 13.44 lb
	Packing Weight	7 Kg, 15.43 lb
	Certification	CE, FCC, KC
Color	Matte Dark Black	
Options & Peripherals	2nd Displays	9.7" (1024 x 768), 13.3" (1920 x 1080) LCD Display, Optional Touchscreen
	Customer Display	VFD, 20 Columns x 2 Lines
	I/O Expansion	Support I/O Expansion Box
	Storage	NVME M.2 128G
	Magnetic Stripe Reader	Comply with ISO 7811, Support 1 & 2 & 3 Track
	Smart Card Reader	EMV Level 1, 2
	Dallas	Dallas i-button Reader
	Fingerprint	Yes
	Camera	5M USB Interface (Internal) (Factory Option)
	Wall Mount Kit	VESA-Compatible, 100 x 100(mm)
	Speaker	2 x 0.7W (Stereo) (Factory Option)
WiFi / Bluetooth	Combo Module, M.2 (Factory Option)	


* Specifications may change without prior notice.

Dimensions

Unit : mm

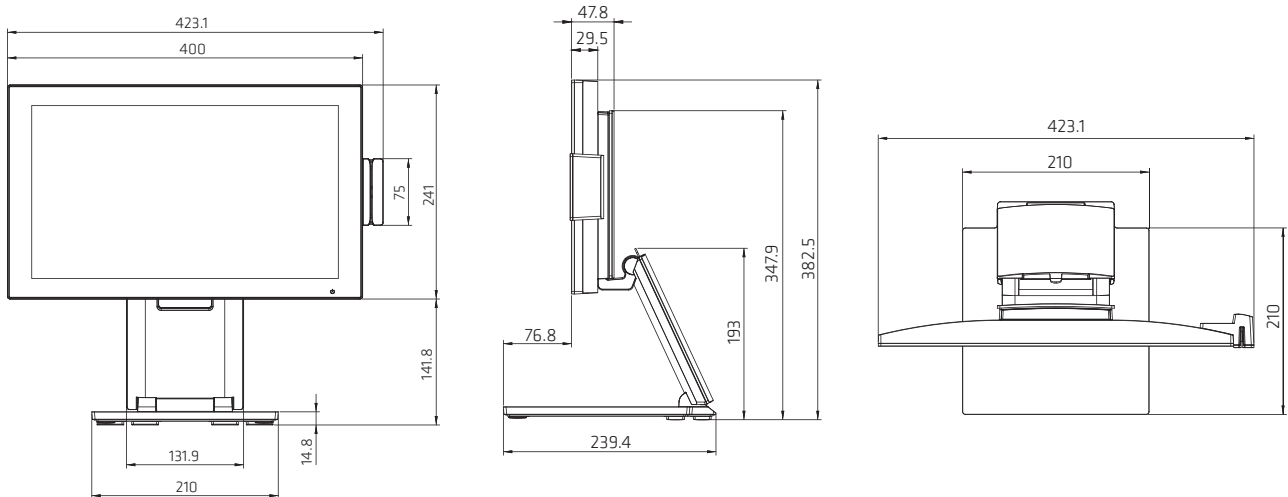


I/O Interfaces

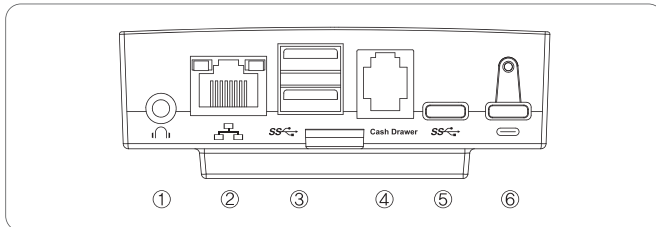

- ① AUDIO OUT
- ② LAN
- ③ USB 3.0 X 2
- ④ RJ - 11 X 1 (Cash Drawer)
- ⑤ USB C X 1
- ⑥ USB C X 1 (DC-IN)

Key Features

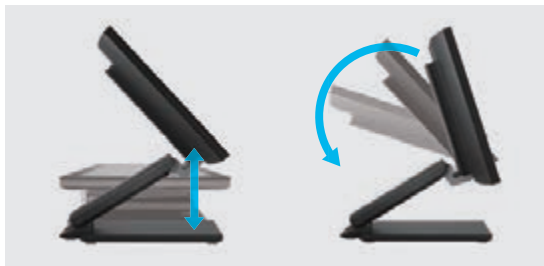

Adjustable Height & Viewing Angle



Swappable System Box



Full Aluminum Die-casting Cabinet

Peripherals



2nd Display
• 9.7", 13.3" LCD



Customer Display
• VFD (2 Line x 20 Characters)



Card Reader
• MSR, SCR

POS BANK[®]

HEADQUARTERS EUROPE / Via P. Mattarella, 32 / 30030 Gardigiano di Scorzè (VE) / T +39 041 58 30 380 / F +39 041 58 30 595 / www.posbank.eu / info@posbank.eu
BRANCH OFFICE MADRID / Edificio Spaces, Calle de José Abascal 41 / 28003 Madrid / T +34 91 91 57 334

Copyright © 2021 POSBANK Co., Ltd. | POSBANK and the POSBANK logo are trademarks of POSBANK in the United States and other countries. All trademarks are the property of their respective owners. Intel, Celeron, Core are registered trademarks of Intel Corporation in the United States and other countries. Microsoft, Windows 7, Windows 8.1, Windows 10 IoT Enterprise and POS Ready 7 are registered trademarks of Microsoft Corporation in the United States and other countries. POSBANK shall not be liable for technical or editorial errors or omission contained herein. The information in this publication is informational purposes only and may be altered or amended by POSBANK. All statements regarding POSBANK's direction and intent are subject to change or withdraw without notice. Specifications may change without prior notice.